

Axcyl

Coaxcyl EM

Durable and stable thick sleeve

Votre Partenaire sur le marché français:

OS GRAPHICS

Sébastien FALZONE - Mobile : (+33) 07.72.18.99.27 -E-mail : sf@os-graphics.com

Administration des Ventes - Mobile: (+33) 07.81.62.45.58 -

E-mail : contact@os-graphics.com

Internet : www.os-graphics.com

Coaxcyl EM


Features and benefits

1. Honeycomb structure, to limit weight and offer excellent rigidity
2. Epoxy resin, to provide exceptional geometric stability
3. Dampening function built-in to reduce press bounce
4. Smooth installation on press & quick make ready




Sealing protection end

- avoid penetration of inks and solvents
- cushion shocks

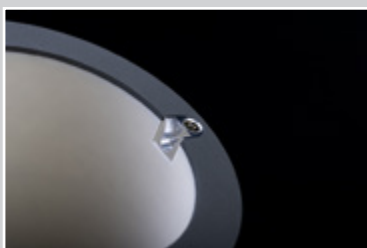

Reinforced slots

- durable and precise registration
- aluminum insert

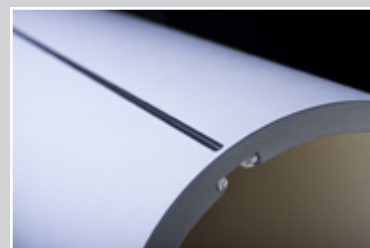

Option: cutting guide, ceramic based

- facilitate cutting and removal of tape
- preserve surface and outer diameter of sleeve


Technical data

Application	Hard pneumatic plate mounting sleeve
Ink system	Compatible with most commercially available water-based, solvent-based and UV Flexo inks
Tapes	Compatible with most commercially available adhesive tapes for plate mounting
Surface	Durable Epoxy & technical fabrics
Utilisation Temperature range	Recommended 20°C - 45°C
Wall thickness range	Possible from 5mm to 100mm
Width range	Possible from 200mm to 2000mm
Stork Diameter range	Possible from 60mm to 400mm
Conductive option	Electrical conductivities of less than 1 MΩ can be realized
Air supply for mounting and demounting	minimum requirements 6 bar pressure and a volume flow 12 l/s
Cleaning	A wide range of commercially used solvents compatible with UV, solvent, and water-based inks
Storage	Recommended temperature 20°C up to 25°C, optional vertical or horizontal storage



CONTINENTAL COATED SYSTEMS FRANCE SAS
 Z.A. de la Grange à Prévaud - 12 Avenue de Saintonge
 17150 Mirambeau, FRANCE
www.continental-industry.com/printing-technology

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates.
 Copyright © 2024 ContiTech Deutschland GmbH. All rights reserved.
 For complete information go to: www.continental-industry.com/discl_en

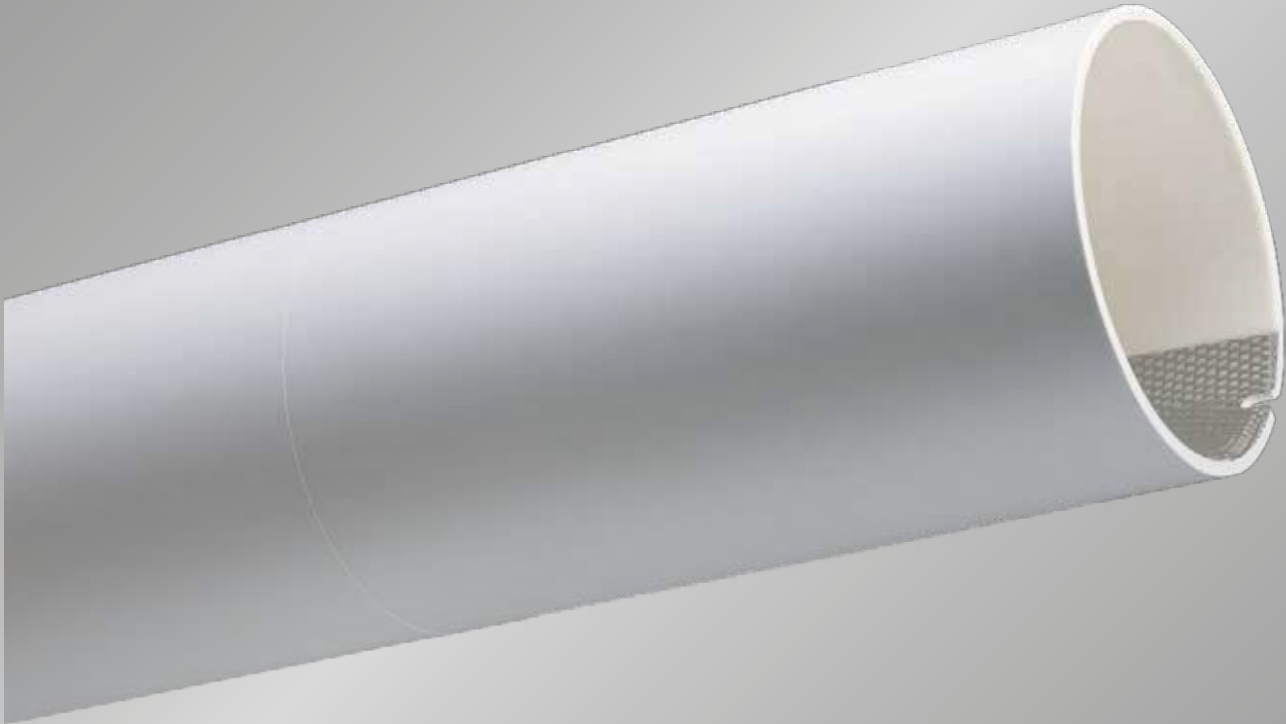

Axcyl

Type R

Durable and stable thin sleeve

Votre Partenaire sur le marché français:

OS GRAPHICS

Sébastien FALZONE - Mobile : (+33) 07.72.18.99.27 -E-mail : sf@os-graphics.com

Administration des Ventes - Mobile: (+33) 07.81.62.45.58 -


E-mail : contact@os-graphics.com

Internet : www.os-graphics.com


Type R

Features and benefits


1. Light and stable structure for consistent print results and easy handling
2. Durable register slots reinforced with carbon fiber, to keep precise registration over time
3. Smooth installation on press and quick make ready

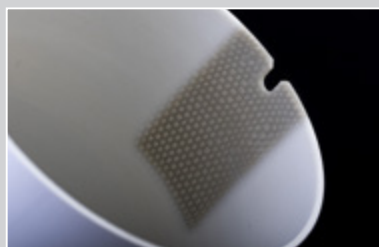

Slot reinforced with carbon fiber
- durable and precise registration

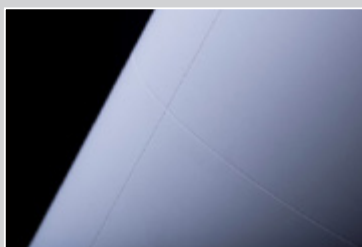

Scribe line
- easy positioning of adhesives and plates

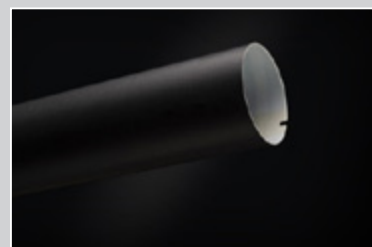

Option
- conductive (antistatic)

Technical data

Application	Hard pneumatic plate mounting sleeve
Ink	Compatible with most commercially available water-based, solvent-based and UV Flexo inks
Tapes	Compatible with most commercially available adhesive tapes for plate mounting
Surface	Durable Epoxy & technical fabrics
Utilisation Temperature range	Recommended 20°C to 45°C
Wall thickness range	Possible from 0.9mm to 4.999mm
Width range	Possible from 200mm to 2000mm
Stork Diameter range	Possible from 60 to 400mm
Conductive (option)	Electrical conductivities of less than 1 MΩ can be realized
Air supply	Minimum requirements 6 bar pressure and a volume flow 12 l/s
Cleaning	A wide range of commercially used solvents compatible with UV, solvent, and water-based inks
Storage	Recommended temperature 20°C up to 25°C, optional vertical or horizontal storage



CONTINENTAL COATED SYSTEMS FRANCE SAS
Z.A. de la Grange à Prévaud - 12 Avenue de Saintonge
17150 Mirambeau, FRANCE
www.continental-industry.com/printing-technology

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates.
Copyright © 2024 ContiTech Deutschland GmbH. All rights reserved.
For complete information go to: www.continental-industry.com/discl_en



FAST TRACK

Axcyl

Fast track

Unique fast delivery Service

Votre Partenaire sur le marché français:
OS GRAPHICS

Sébastien FALZONE - Mobile : (+33) 07.72.18.99.27 -E-mail : sf@os-graphics.com
Administration des Ventes - Mobile: (+33) 07.81.62.45.58 -
E-mail : contact@os-graphics.com
Internet : www.os-graphics.com

Fast track

What does the Fast Track service offer?

This service is designed to meet a global market trend and it is aimed at reducing the time to market.

By supplying one set of sleeves within 10 working days, the Fast Track service allows converters to accelerate their performance by delivering their products faster to brands & print buyers.

Conditions of availability and terms of the service

1. Available for any client world-wide.
2. Available for 1 set up to 10 units.
3. Production capacity must be available once the Fast Track service is requested.
4. Required tooling needs to be available to provide the service.
5. An additional charge will be applied to book the service.



CONTINENTAL COATED SYSTEMS FRANCE SAS
Z.A. de la Grange à Prévaud - 12 Avenue de Saintonge
17150 Mirambeau, FRANCE
www.continental-industry.com/printing-technology

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates.
Copyright © 2024 ContiTech Deutschland GmbH. All rights reserved.
For complete information go to: www.continental-industry.com/discl_en